


Uni Plyta

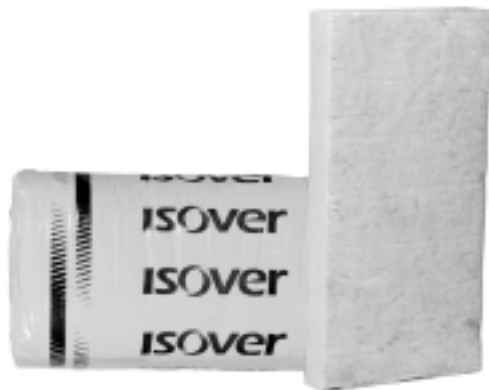

Uni Plyta, glass wool board, thanks to its universal technical parameters most often used for different types of walls.

Application:

Thermal and acoustic insulation suitable in:

- brick walls with plaster
- walls covered with steel sheeting, wooden or plastic siding
- outside and inside walls in steel or wooden structure
- partition and suspended ceiling.

Characteristics:

Max. usage temperature: 200°C

- easy to cut, handle and minimises dust during installation
- doesn't require any special fixing accessories
- insulation's elasticity enable gaps to be filled tightly
- avoids heat losses through cold bridges

Uni Plyta - technical specification

Product	Thickness [mm]	Width [mm]	Length [mm]	R _D [m ² /KW]	Quantity [m ² /pack]	Qty im MPS [m ² /pallet]
Uni Mata	50	1200	600	1,40	14,40	288,0
Uni Mata	80	1200	600	2,25	8,64	172,8
Uni Mata	100	1200	600	2,85	5,76	115,2
Uni Mata	150	1200	600	4,25	4,32	86,4